

archgroup

architects , engineers,
interior designeres

507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9430001170
REF:- DAV-AB/SB/PB/01/25-26


Date:- 28 NOV. 2025

FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF FIXING PAVER BLOCKS & SAND FILLING IN CAMPUS OF D.A.V. PUBLIC SCHOOL, DAYANAND VIHAR, AURANGABAD, BIHAR.						
Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(1) 80 MM THICK M35 GRADE C.C. PAVER BLOCKS				
		(i) Area of N-W Side Pavers = 9802.00 Sft. (ii) Area of N-S Side Pavers = 4870.17 Sft. (iii) Area of west side Pavers = 1327.50 Sft. (iv) Area of rear side Pavers near drain = 1582.50 Sft. (v) Area of courtyard Pavers = 1643.75 Sft.				
		Total Area of Pavers from (i) to (v) = 19225.92 Sft. (1786.80 Sqm)				
		SECTION-I (PAVER WORK)				
1	11.79	Providing and laying factory made chamfered edge Cement Concrete paver blocks of required strength thickness & size/shape, made by table vibratory method, to attain superior smooth finish using PU or equivalent moulds, laid in required grey colour & pattern over 50mm thick compacted bed of coarse sand, compacting and proper embedding/laying of inter locking paver blocks into the sand bedding layer through vibratory compacting by using plate vibrator, filling the joints with jamuna sand and cutting of paver blocks as per required size and pattern, finishing and sweeping extra sand in footpath, parks, lawns, drive ways or light traffic parking etc. all complete as per manufacture's specifications & direction of Engineer-in charge.				
	11.79.1	(a) 80 mm thick c.c.paver blocks of M-35 grade with approved colour design and pattern.	893.40	Sqm		
	11.79.2	(b) 80 mm thick c.c.paver blocks of M-35 grade with white colour design and pattern.	893.40	Sqm		
		TOTAL				
		ROUNDUP				
		Cost of Paver Blocks per Sft.				
		(2) SAND FILLING UNDER C.C. PAVER BLOCKS				
		Quantity of sand (with slope of 6") in raising level from 11" to 5" towards boundary wall.				
		(a.) Quantity of sand filling in N-W side Area = 3" x 9802.00 Sft = 2450.50 Cft. (b.) Quantity of sand filling in N-S side Area = 3" x 4870.17 Sft = 1217.54 Cft. (c.) Quantity of sand filling in West side Area = 3" x 1327.50 Sft = 331.88 Cft. (d.) Quantity of sand filling in rear side Area = 3" x 1582.50 Sft = 395.63 Cft. (e.) Quantity of sand filling in courtyard = 3" x 1643.75 Sft = 410.94 Cft.				



Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
Total quantity of sand filling from (a) to (e) = 4806.49 Cft.(136.20 Cum)						
		SECTION-I (EARTH WORK/SAND FILLING)				
1	2.28	Supplying and filling in plinth with local sand under floors including, watering, ramming consolidating and dressing complete.	136.2	Cum		
		TOTAL				22122.22
		ROUNDUP				
		Cost of sand filling per Cft.				1
(3) DISMANTLING 80 MM THICK M35 GRADE C.C. PAVER BLOCKS OF INNER COURT YARD						
Area of Pavers block = 9802.00 Sft (910.97 Sqm);						
		SECTION-I (DISMANTLING WORK)				
1	MR	Dismantling of pavers block and stacking at site etc. complete as per direction of Engineer-in-charge.	910.97	Sqm		
		TOTAL				1
		ROUNDUP				1
		Cost of Paver Blocks per Sft.				
(4) DISMANTLING BRICK SOLING OF INNER COURT YARD						
Area of Brick soling = 4870.17 Sft (452.62 Sqm);						
		SECTION-I (DISMANTLING WORK)				
1	MR	Dismantling of brick soling and stacking at site etc. complete as per direction of Engineer-in-charge.	452.17	Sqm		
		TOTAL				22117.17
		ROUNDUP				
		Cost of Paver Blocks per Sft.				

Note:- Good pavers after dismantling will be utilised and the cost of pavers block will be deducted from the bill of the contractor. Quantity of sand filling is extra to raise the level apart from 50 mm thick sand required in fixing the paver blocks.

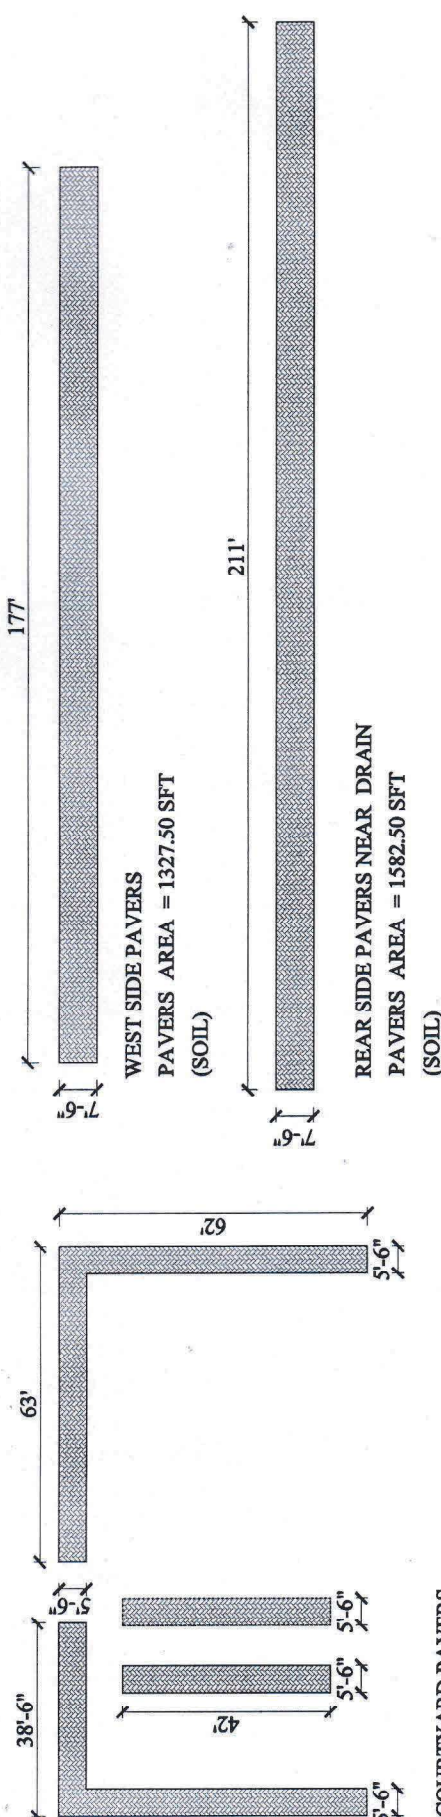

COURTYARD PAVERS

PAVERS AREA = 522.5 + 657.25 + 2X232 = 1643.75 SFT
(SOIL, PLANTERS)

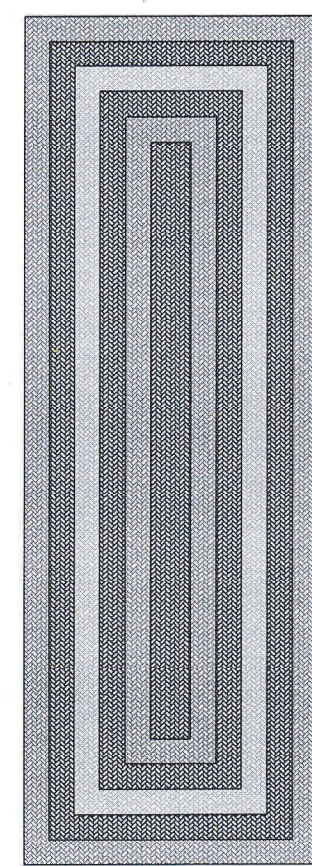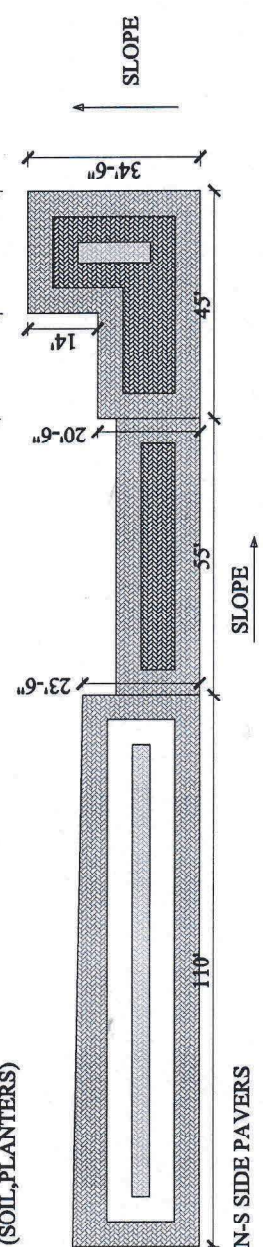

PAVER BLOCKS - M-35, 80 mm thick cement concrete paver blocks equal in colors and white over sand filling over compact earth as per required proposed slope depending on site condition.

DRG. NO.-1	DATE NOV.-25	archgroup architects, engineers, interior designers, 507(A) GANGA-A, AIMS-1, VASTU VIHAR PH-VI, NE-139, NAUBASTUP ROAD, AIMS-1, PATNA-801503, PH-9430001170
TITLE LAYOUT PLAN (PAVERS)		

PAVED PAVERS FLOORING & SAND FILLING AT D.A.V. PUBLIC SCHOOL, DAYANAND VIHAR,
GABAD, BIHAR.